



INSTALLATION INSTRUCTIONS

Description: **Engine Guard**


Part Number: **990A0-75037**

Applications: **C50**

Installation Time: **.25 HRS**


Contents

Ref.	Part Number	Description	QTY
1.		Engine Guard - Left	1
2.		Engine Guard - Right	1
3.		M10-1.25x35mm Hex Flange Head Bolt	2
4.		M10-1.25x20mm Hex Flange Head Bolt	2
5.		Mounting Spacer	2
6.	990A0-75037-001	Bolt/Spacer Replacement Kit	

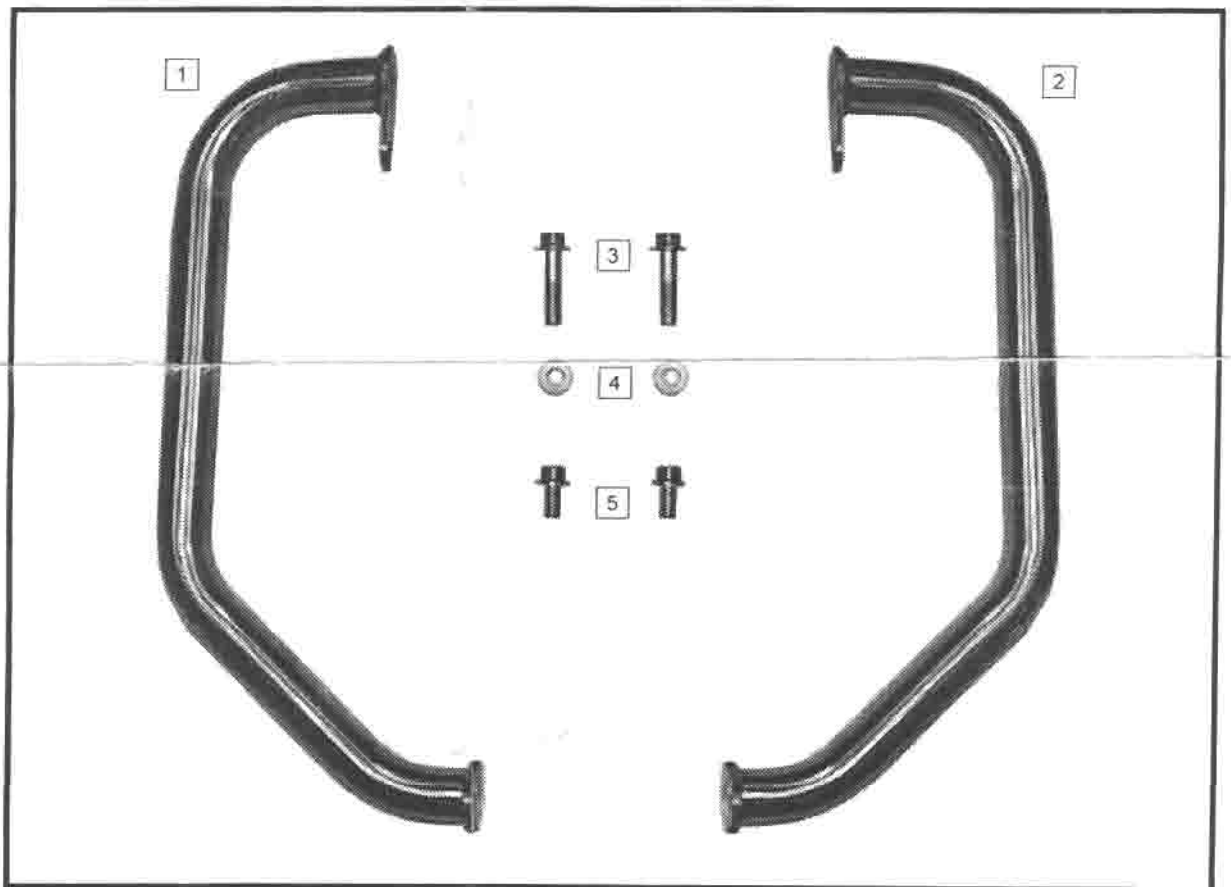

Tools Required

Ref.	Tools Description
1.	Ratchet
2.	Torque Wrench
3.	15mm Socket

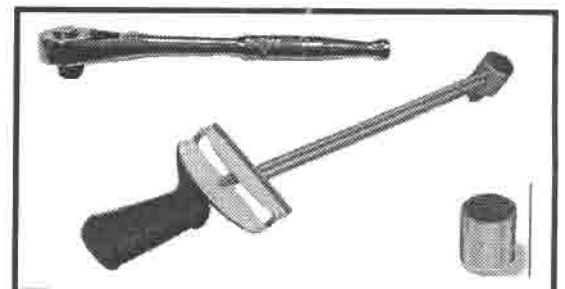

Important

⚠ WARNING

Please read this manual and follow its instructions carefully. To emphasize special information, the symbol ⚠ and the words **WARNING** and **NOTE** have special meanings. Pay special attention to the messages highlighted by these signal words:

NOTE: Indicates special information to make maintenance easier or instructions clear.

⚠ WARNING

Indicates potential hazard that could result in death or injury.

Preparation Prior to Installation

Please read and understand these instructions completely before installation to avoid any possible injury to yourself or damage to the motorcycle and/or accessory.

NOTE to DEALER: These instructions contain important information for future reference and must be given to the customer.

Installation

1. With one provided spacer under the upper mount bracket of the left side engine guard, place the engine guard against the existing threaded hole in the left side frame down tube. Feed the provided M10-1.25x35mm hex flange head bolt through the upper engine guard bracket, the mount spacer, and loosely secure to the frame down tube. See Figure #1
2. Place the lower engine guard mount bracket against the existing threaded hole on the inside of the frame down tube. Using one provided M10-1.25x25mm hex flange head bolt, loosely secure the mount bracket to the threaded hole.
3. Repeat steps 1 and 2 for the right side.
4. Tighten all mounting hardware to 50 N.m (36 lb-ft).

NOTE: Periodically check the tightness of mounting hardware and tighten if necessary.

