



TARA operating notes for Kenwood TH-22AT

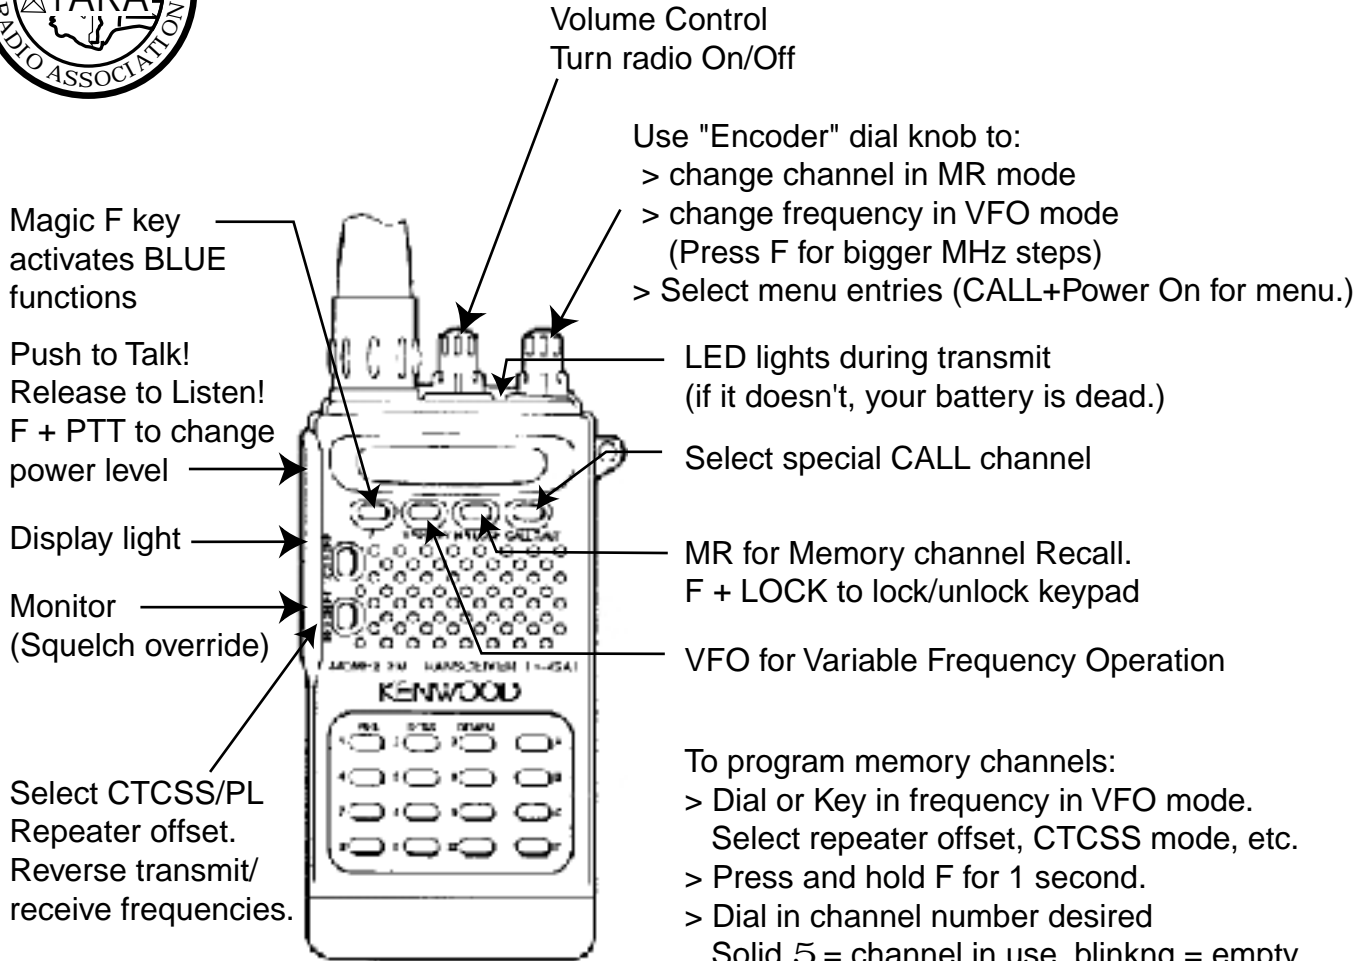

Hold [F] 1 second then
 >T/CT to set PL freq.
 >REV to set rpt offset

To program memory channels:
 > Dial or Key in frequency in VFO mode.
 Select repeater offset, CTCSS mode, etc.
 > Press and hold F for 1 second.
 > Dial in channel number desired
 Solid 5 = channel in use, blinking = empty.
 >Press MR to store or F to cancel.

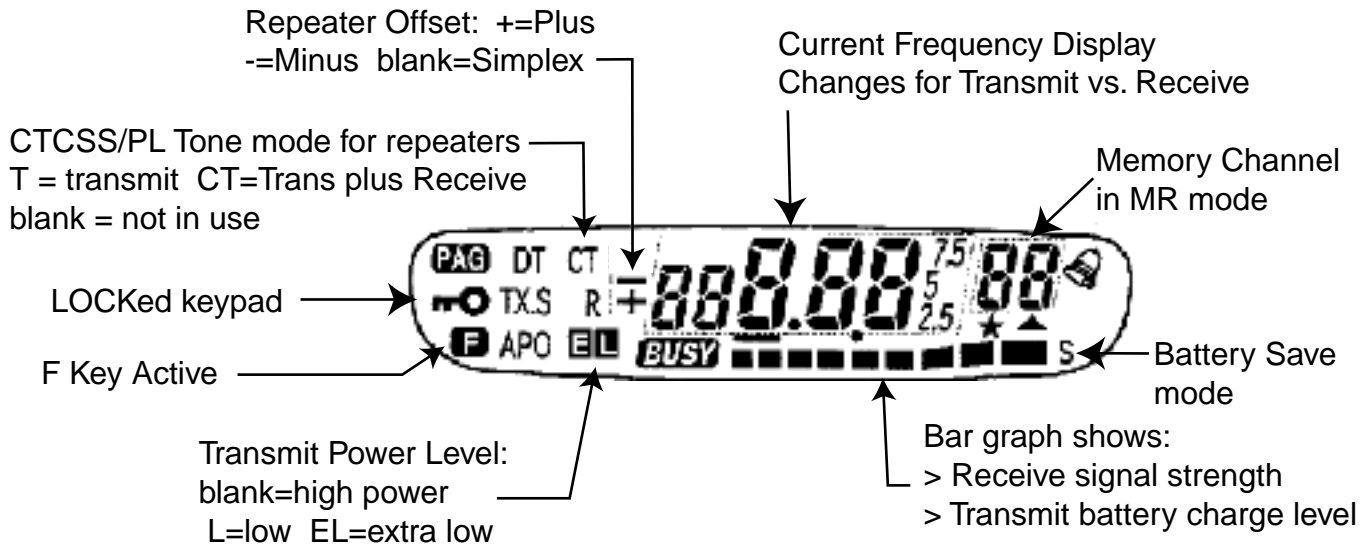

Other indicators you don't (usually) want to see:
 PAG=pager mode DT=DTMF squelch mode
 TX.S=Transmit inhibit APO=Auto Power Off