

2-D Wavelet Transform

Feb. 01, 1996

Mallat's Algorithm in 2-D

haar_01.mcd

$$N := 7 \quad i := 0..N \quad j := 0..N \quad N1 := 3.5 \quad b \equiv 1.2 \quad a \equiv \frac{1}{2} \quad i2 := 0.. \frac{N-1}{2} \quad j2 := 0.. \frac{N-1}{2} \quad m := 0..1 \quad n := 0..1$$


Use the 2-D Harr basis

$$k0 := \begin{pmatrix} a & a \\ a & a \end{pmatrix} \quad k1 := \begin{pmatrix} -a & a \\ -a & a \end{pmatrix}$$

$$k2 := \begin{pmatrix} -a & -a \\ a & a \end{pmatrix} \quad k3 := \begin{pmatrix} a & -a \\ -a & a \end{pmatrix}$$

Define f(x,y)

$$f \equiv \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 2 & 4 & 4 & 2 & 0 & 0 \\ 0 & 1 & 4 & 8 & 8 & 4 & 1 & 0 \\ 0 & 1 & 4 & 8 & 8 & 4 & 1 & 0 \\ 0 & 0 & 2 & 4 & 4 & 2 & 0 & 0 \\ 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix}$$

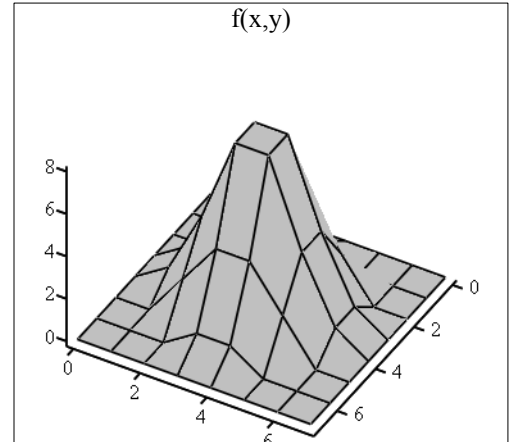

(1) Convolve f(x,y) with the basis images

$$f_{N+1,j} := f_{0,j} \quad f_{j,N+1} := f_{j,0}$$

$$f10_{i,j} := \sum_m \sum_n f_{i+m,j+n} \cdot k0_{m,n} \quad f$$

$$f11_{i,j} := \sum_m \sum_n f_{i+m,j+n} \cdot k1_{m,n}$$

$$f12_{i,j} := \sum_m \sum_n f_{i+m,j+n} \cdot k2_{m,n}$$

$$f13_{i,j} := \sum_m \sum_n f_{i+m,j+n} \cdot k3_{m,n}$$



(2) Subsample the rows and columns

$$f20_{i2,j2} := f10_{2 \cdot i2, 2 \cdot j2}$$

$$f21_{i2,j2} := f11_{2 \cdot i2, 2 \cdot j2}$$



$$f22_{i2,j2} := f12_{2 \cdot i2, 2 \cdot j2}$$

$$f23_{i2,j2} := f13_{2 \cdot i2, 2 \cdot j2}$$

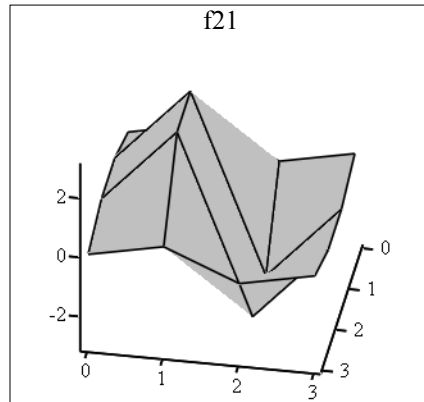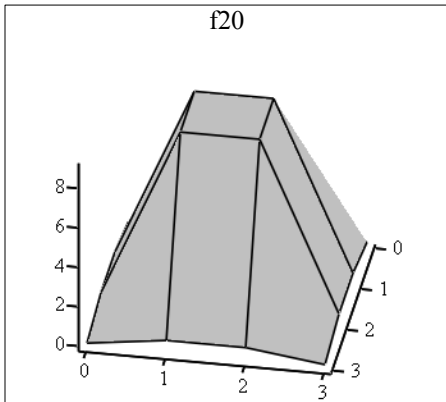

$$f20 = \begin{pmatrix} 0 & 0.5 & 0.5 & 0 \\ 0.5 & 9 & 9 & 0.5 \\ 0.5 & 9 & 9 & 0.5 \\ 0 & 0.5 & 0.5 & 0 \end{pmatrix}$$

$$f21 = \begin{pmatrix} 0 & 0.5 & -0.5 & 0 \\ 0.5 & 3 & -3 & -0.5 \\ 0.5 & 3 & -3 & -0.5 \\ 0 & 0.5 & -0.5 & 0 \end{pmatrix}$$

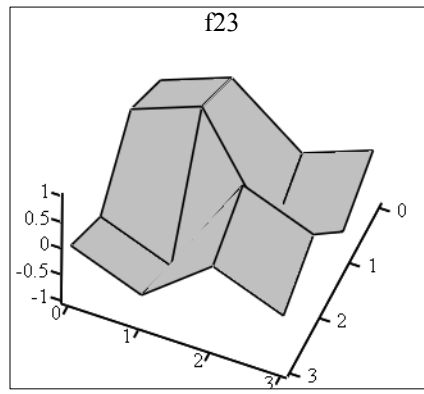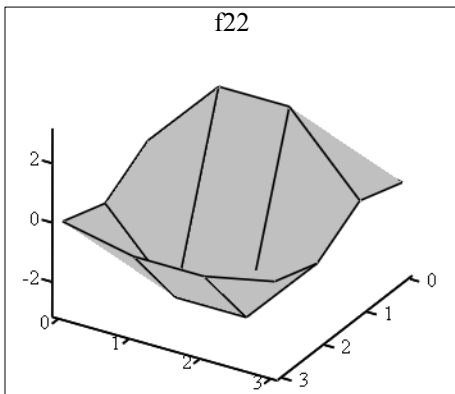

$$f22 = \begin{pmatrix} 0 & 0.5 & 0.5 & 0 \\ 0.5 & 3 & 3 & 0.5 \\ -0.5 & -3 & -3 & -0.5 \\ 0 & -0.5 & -0.5 & 0 \end{pmatrix}$$

$$f23 = \begin{pmatrix} 0 & 0.5 & -0.5 & 0 \\ 0.5 & 1 & -1 & -0.5 \\ -0.5 & -1 & 1 & 0.5 \\ 0 & -0.5 & 0.5 & 0 \end{pmatrix}$$

f22

f23

NOW THE INVERSE TRANSFORM

Upsample with rows and columns of zeros

$$i1 := 0..N + 1 \quad j1 := 0..N + 1$$

$$g10_{i1,j1} := 0$$

$$g11_{i1,j1} := 0$$

$$g12_{i1,j1} := 0$$

$$g13_{i1,j1} := 0$$

$$g10_{2 \cdot i2+1, 2 \cdot j2+1} := f20_{i2,j2}$$

$$g11_{2 \cdot i2+1, 2 \cdot j2+1} := f21_{i2,j2}$$

$$g12_{2 \cdot i2+1, 2 \cdot j2+1} := f22_{i2,j2}$$

$$g13_{2 \cdot i2+1, 2 \cdot j2+1} := f23_{i2,j2}$$

$$g10 = \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 9 & 0 & 9 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 9 & 0 & 9 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix}$$

$$g11 = \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & -1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 3 & 0 & -3 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 3 & 0 & -3 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & -1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix}$$

$$g12 = \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 3 & 0 & 3 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & -3 & 0 & -3 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & -1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix}$$

$$g13 = \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & -1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 1 & 0 & -1 & 0 & -1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & -1 & 0 & 1 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix}$$

$$k0 := \begin{pmatrix} a & a \\ a & a \end{pmatrix}$$

$$k1 := -\begin{pmatrix} -a & a \\ -a & a \end{pmatrix}$$

$$g0_{i,j} := \sum_m \sum_n g10_{i+m,j+n} \cdot k0_{m,n}$$

$$g1_{i,j} := \sum_m \sum_n g11_{i+m,j+n} \cdot k1_{m,n}$$

$$k2 := -\begin{pmatrix} -a & -a \\ a & a \end{pmatrix}$$

$$k3 := \begin{pmatrix} a & -a \\ -a & a \end{pmatrix}$$

$$g2_{i,j} := \sum_m \sum_n g12_{i+m,j+n} \cdot k2_{m,n}$$

$$g3_{i,j} := \sum_m \sum_n g13_{i+m,j+n} \cdot k3_{m,n}$$

$$g0 = \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 5 & 5 & 5 & 5 & 0 & 0 \\ 0 & 0 & 5 & 5 & 5 & 5 & 0 & 0 \\ 0 & 0 & 5 & 5 & 5 & 5 & 0 & 0 \\ 0 & 0 & 5 & 5 & 5 & 5 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix}$$

$$g1 = \begin{pmatrix} 0 & 0 & -0 & 0 & 0 & -0 & 0 & 0 \\ 0 & 0 & -0 & 0 & 0 & -0 & 0 & 0 \\ -0 & 0 & -2 & 2 & 2 & -2 & 0 & -0 \\ -0 & 0 & -2 & 2 & 2 & -2 & 0 & -0 \\ -0 & 0 & -2 & 2 & 2 & -2 & 0 & -0 \\ -0 & 0 & -2 & 2 & 2 & -2 & 0 & -0 \\ 0 & 0 & -0 & 0 & 0 & -0 & 0 & 0 \\ 0 & 0 & -0 & 0 & 0 & -0 & 0 & 0 \end{pmatrix}$$

$$g2 = \begin{pmatrix} 0 & 0 & -0 & -0 & -0 & -0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ -0 & -0 & -2 & -2 & -2 & -2 & -0 & -0 \\ 0 & 0 & 2 & 2 & 2 & 2 & 0 & 0 \\ 0 & 0 & 2 & 2 & 2 & 2 & 0 & 0 \\ -0 & -0 & -2 & -2 & -2 & -2 & -0 & -0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & -0 & -0 & -0 & -0 & 0 & 0 \end{pmatrix}$$

$$g3 = \begin{pmatrix} 0 & 0 & 0 & -0 & -0 & 0 & 0 & 0 \\ 0 & 0 & -0 & 0 & 0 & -0 & 0 & 0 \\ 0 & -0 & 1 & -1 & -1 & 1 & -0 & 0 \\ -0 & 0 & -1 & 1 & 1 & -1 & 0 & -0 \\ -0 & 0 & -1 & 1 & 1 & -1 & 0 & -0 \\ 0 & -0 & 1 & -1 & -1 & 1 & -0 & 0 \\ 0 & 0 & -0 & 0 & 0 & -0 & 0 & 0 \\ 0 & 0 & 0 & -0 & -0 & 0 & 0 & 0 \end{pmatrix}$$

The final result

$$g := (g0 + g1 + g2 + g3)$$

$$g = \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 2 & 4 & 4 & 2 & 0 & 0 \\ 0 & 1 & 4 & 8 & 8 & 4 & 1 & 0 \\ 0 & 1 & 4 & 8 & 8 & 4 & 1 & 0 \\ 0 & 0 & 2 & 4 & 4 & 2 & 0 & 0 \\ 0 & 0 & 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix}$$