




Voltage (V)

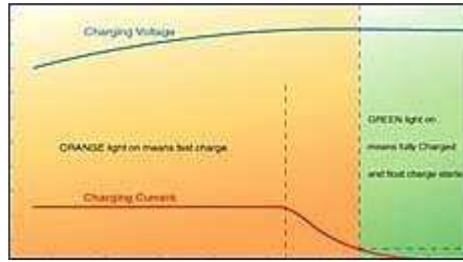

Current (A)

Time (h)

SPECIFICATION :

ITEM	BATTERY CHARGER	
BATTERY APPLICATION	LEAD ACID BATTERIES	
PERFORMANCE	SWITCHING MODE	
MODEL	4C24040	4C24080
OUTPUT CURRENT	4Adc ±5%	8Adc ±5%
OUTPUT VOLTAGE	28.8Vdc ±2%	
INPUT VOLTAGE	100 ~ 120 Vac / 200 ~ 240 Vac (SELECTED)	
OUTPUT DETECTION	1.SHORT CIRCUIT DETECTION 2.OUTPUT VOLTAGE / CURRENT LIMIT 3.REVERSE POWER PROTECTED 4.OVERHEAT DETECTION	
OPERATING HUMIDITY	20% ~ 85%	
MEASUREMENT	L195mm X W100mm X H55mm	L230mm X W100mm X H55mm
WEIGHT	920 g	1180 g
COLOR	BLACK	
CERTIFICATION	UL , CE , FCC , VCCI , T-mark	