


TARA operating notes for Yaesu VX-150

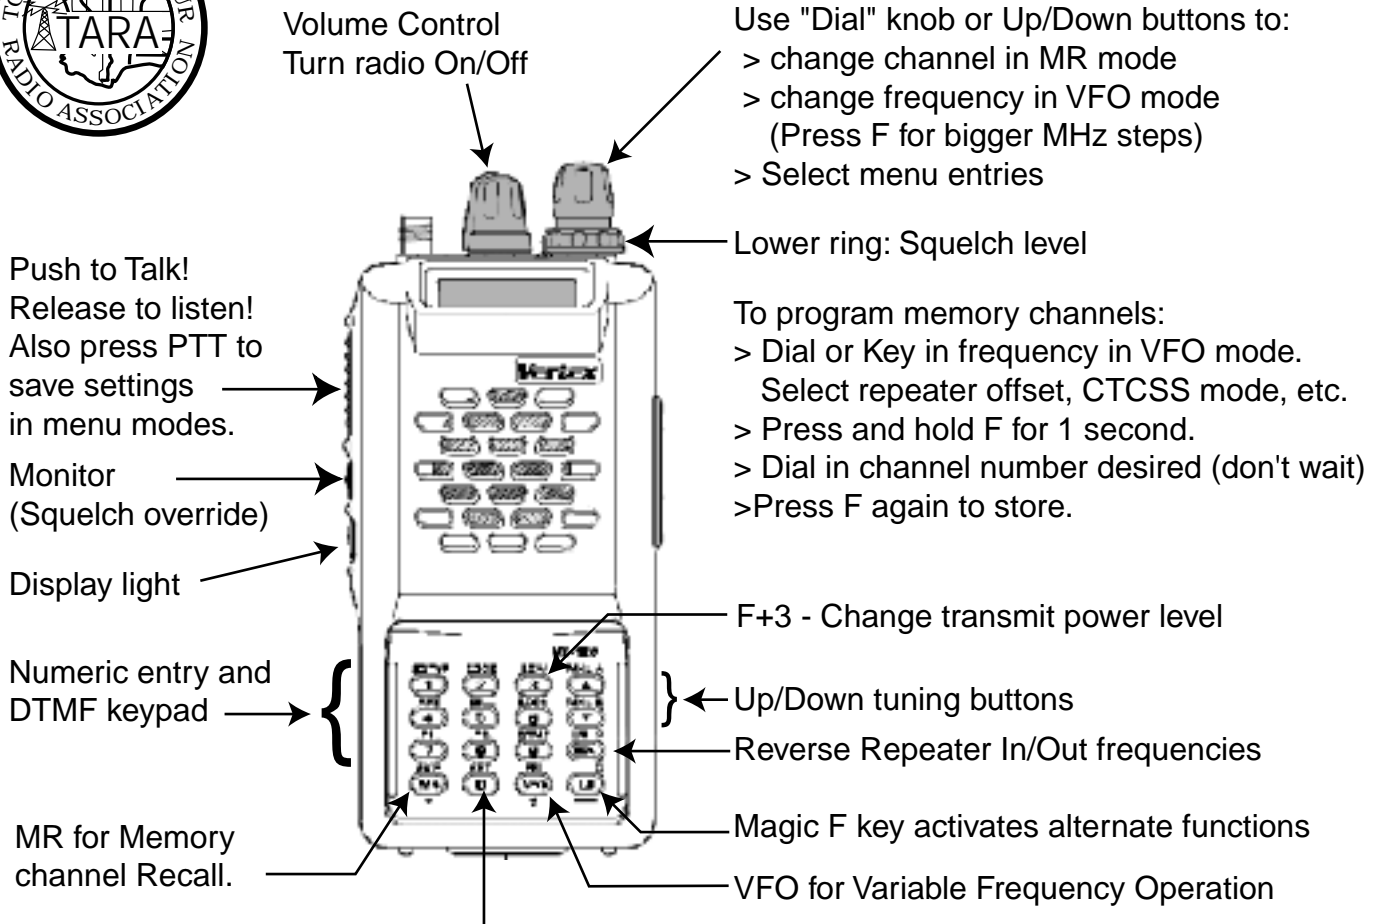

F + 0 (SET) to enter menu setting mode. Dial desired entry, press F again, dial desired value, then press PTT to store.

Some useful settings:

- RPT - Repeater offset direction
- SHIFT - Repeater offset magnitude
- SQL TYP - PL/CTCSS tone modes (or F+1)
- TN SET - PL tone frequency (or F+2)
- RX SAVE - Battery save mode
- BATT - (view) battery voltage

CTCSS/PL Tone mode for repeaters
 T = transmit TSQ=Trans plus Receive
 blank = not in use

Repeater Offset: +=Plus
 -=Minus blank=Simplex

