


SECOND ORDER BUTTERWORTH FILTER - CENTERED AT 1500 HZ WITH A 30% FREQUENCY SPREAD FOR GREAT PLAINS AUDIO 604-8L/ICONIC 704-8A.
 COMPRESSION DRIVER ACOUSTIC POLARITY REVERSED.

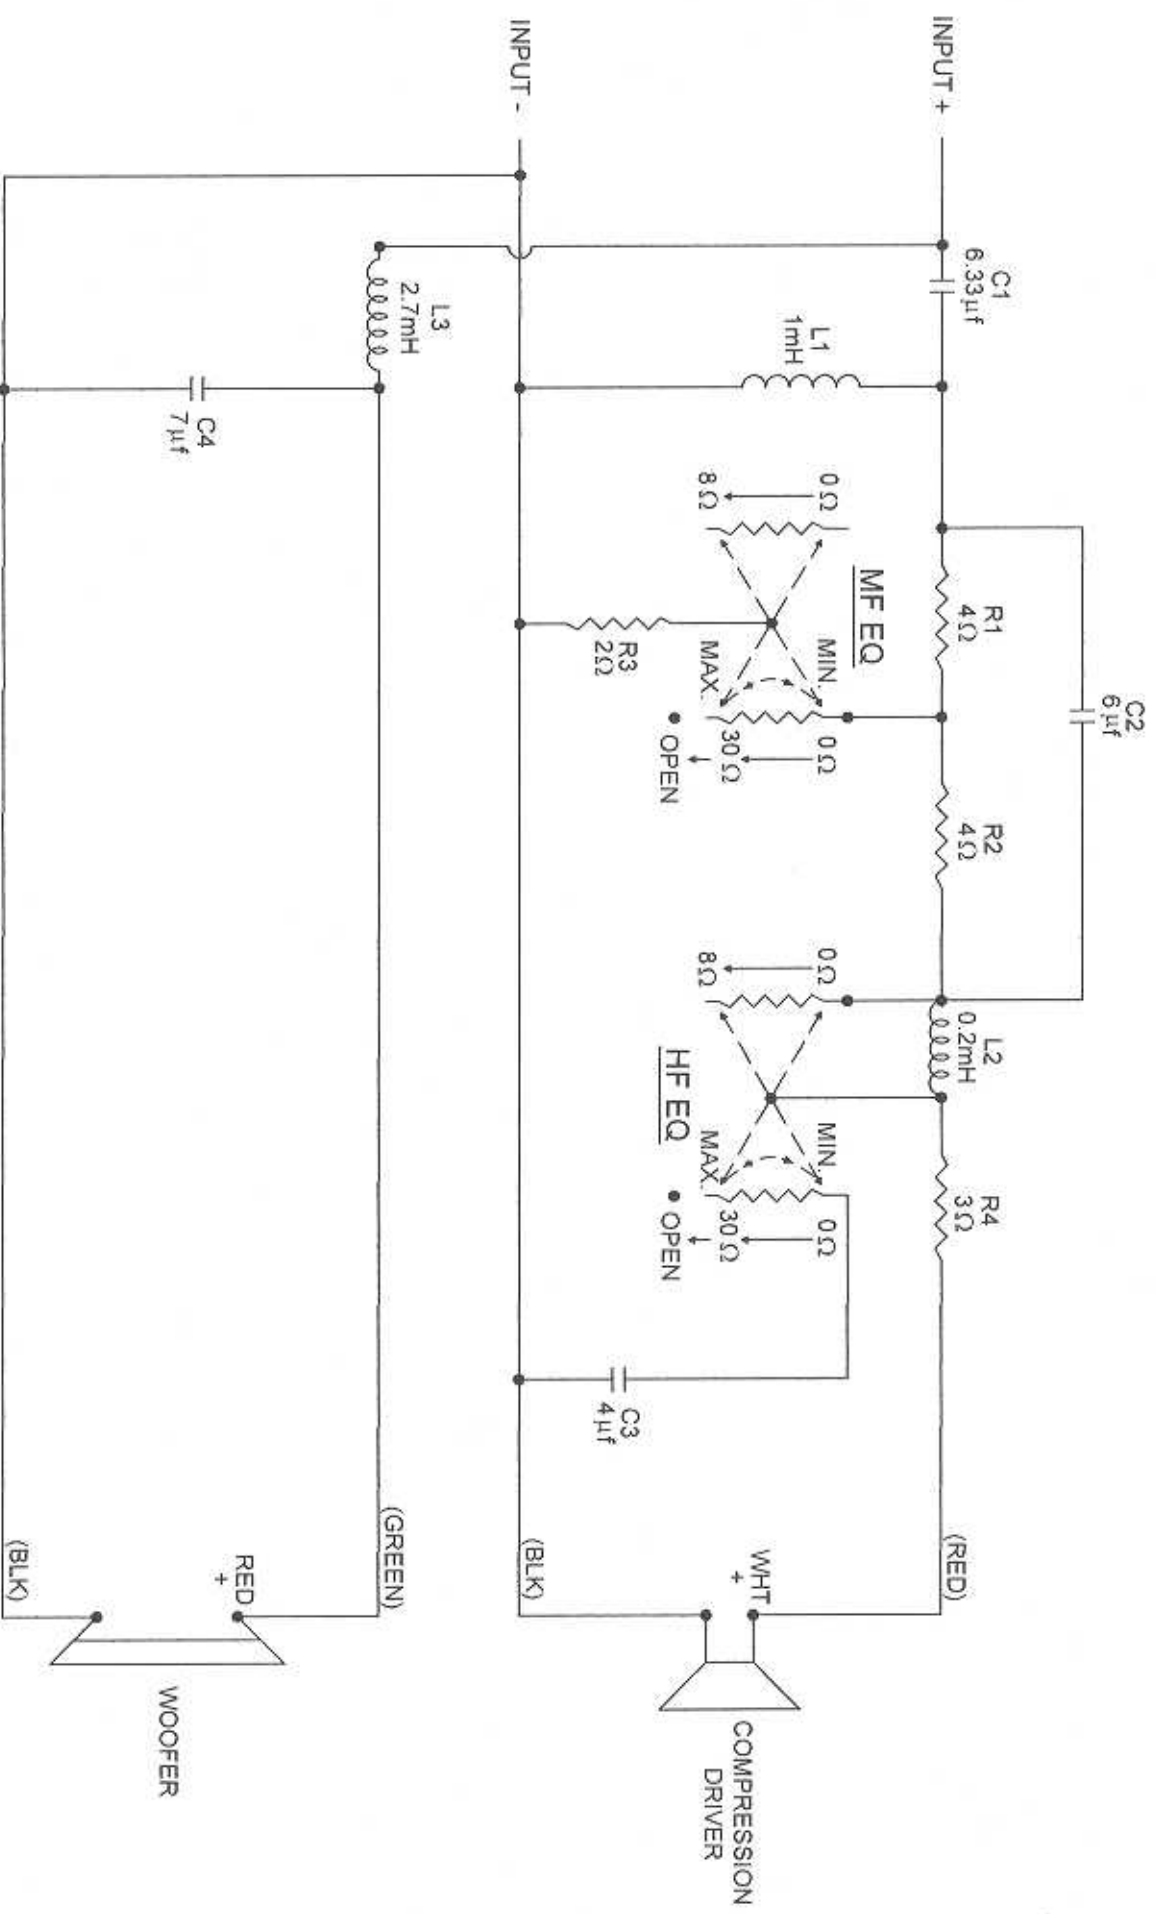

NOTES:

- CAPACITORS - METALIZED POLYPROPYLENE, 100V MIN.
- RESISTORS - 10W NON-INDUCTIVE
- INDUCTORS - COPPER FOIL AIR CORE; L1 & L2 = 16 GA., L3 = 14 GA.
- MF & HF EQ - 8 OHM L-PADS
- WIRE - VAMPIRE CCC, 18 GA. STRANDED, (COLOR) AS INDICATED